

Moulds for casting nonferrous alloys

KME Germany GmbH & Co. KG
Moulds for casting nonferrous alloys
[GB]



Table of contents

KME	1
Engineered products for melting and casting	2
Research & development and engineering	4
Mould materials for nonferrous casting	6
KME-materials for casting wheels	7
KME-materials for dam blocks	8
KME-materials for casting sleeves	9
Properties and applications of KME nonferrous mould alloys	10
KME mould materials for casting nonferrous alloys	12
Nonferrous mould manufacturing	14
KME after-sales service	15
Manufacturing range of KME casting wheels	17

KME offers a unique combination of know-how and experience in all key technologies for the production of high-performance moulds for casting nonferrous alloys.

KME

KME's corporate goal is to develop and manufacture products that meet customer demands, finding solutions for their specific applications, and providing services as a long-term partner. KME's strategy for accomplishing this goal is based on a highly skilled and experienced workforce. KME has the ability to invent and develop new materials and innovative production processes via ongoing advancement and training of our employees and the continual improvement of its organisational structures.






Continuous casting technology with casting wheels

Engineered products for melting and casting

The Engineered Products Division was formed with the aim of providing flexible solutions to the changing market demands and improving the customer orientation of our business. Our customers are producers of nonferrous metals, casting machine builders and maintenance companies throughout the world.

Continuous casting of nonferrous alloys has seen major improvements in terms of quality and economics of operation over the past decades. This success is based on improvements in casting machine design, mould design and materials.


The advances in nonferrous alloys casting were made possible by the further development of high-performance moulds made of copper materials. KME was involved in these developments right from the very beginning and has continued to set milestones in the development and production of casting wheels, dam blocks and casting sleeves which have undertaken an evolution of their own.


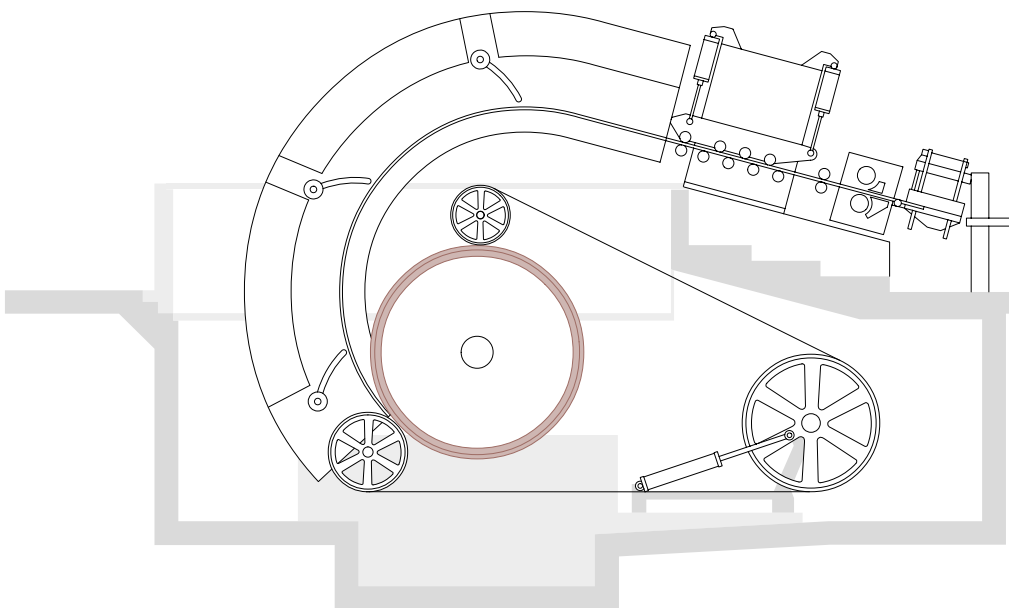


Research & development and engineering

The goal of our work is to constantly improve our products for the benefit of our customers. To this end, KME is working on new materials and materials processing. The R&D department has been set up in such a way that it can deal with the complete range of assignments, from developing new mould materials right through to supporting the application of newly developed moulds.

Continuous casting technology with dam blocks

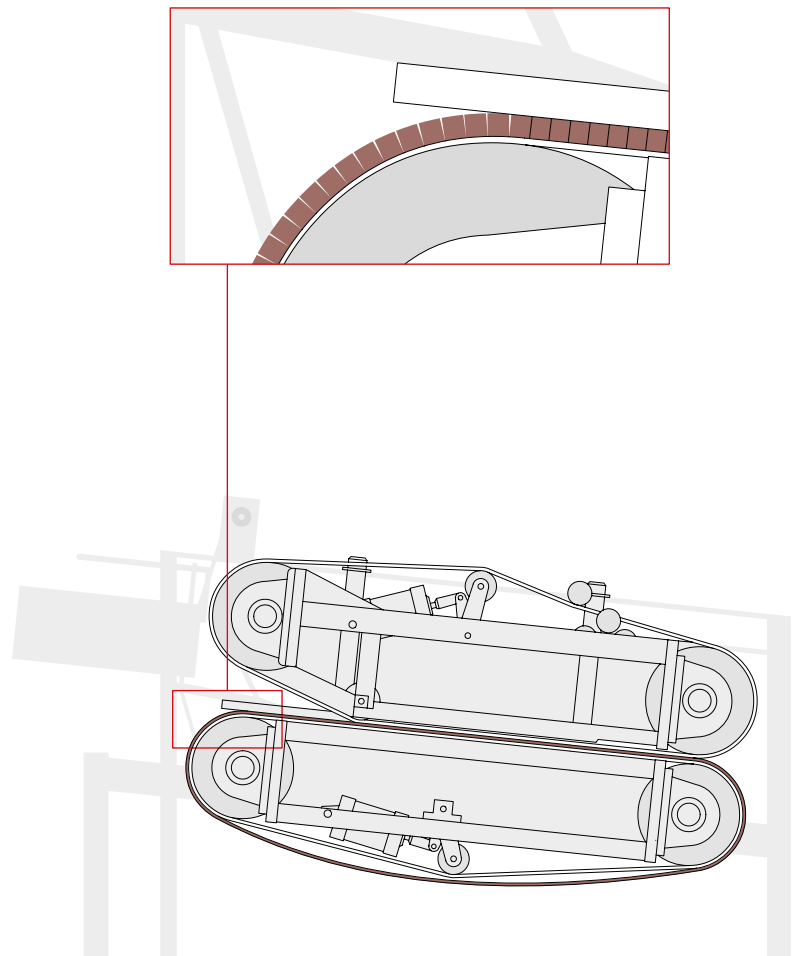

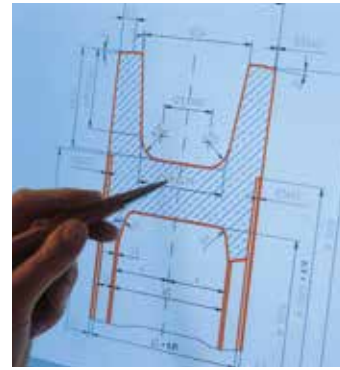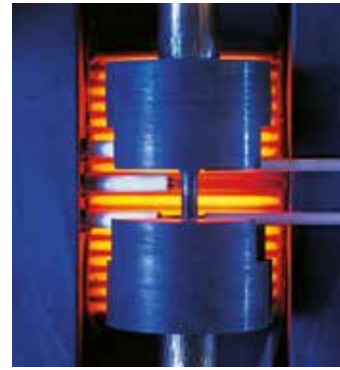

The development of new materials involves testing new compounds as well as the further development of known ones. The R&D department for material development solves both tasks. In addition, KME can provide detailed engineering support on the design of moulds or the adjustment of cooling conditions. For this purpose KME conducts FEM calculations to allow a detailed thermal and mechanical stress analysis. On request KME will also do the detail engineering based on the plant maker's drawings.



The laboratory's melting and casting facilities are capable of casting blocks which can be further processed in the production facilities. This means that the optimal production parameters can be determined in advance. A rolling mill and a press, together with annealing and salt-bath furnaces, are used for thermo-mechanical treatments within the department.



The development of materials is supported by the full range of chemical analysis (S-OES, XRS, ICP, GF-AAS, etc.) including metallography and by SEM/TEM electron microscopes, including EDX/WDX analysis systems. The technological laboratories for physics and mechanics are equipped with all of the necessary devices for testing and measuring (including tests on creep, relaxation, softening, fatigue resistance, etc.).

Destructive tests provide additional data, making it possible to compile customer-specific information on particular stresses such as thermal/chemical problems.

Today, basic laboratory work is supplemented by development work for the customer, focusing on high casting speeds accompanied by the highest reliability and service life of the moulds in the industrial applications.



Thus, the primary concern of all development activities carried out by KME is to provide technical support to customers on how to optimise their facilities, processes and products.



Mould materials for nonferrous casting

Copper and copper alloys for nonferrous moulds

Material sciences and the development of copper alloy systems have for many years represented an important area for KME as the leading manufacturer of copper products. A major part of KME's effort in these fields is dedicated to the development of copper alloy systems for moulds.

In contrast to most of the steel continuous casting applications where the mould is subject to quasi-stationary stresses, nonferrous casting mostly results in a transient, cyclical stress in the mould (wire cast process, Hazelett) and to the

mould material. Special balanced materials and appropriately adapted manufacturing and thermal handling processes are required to achieve optimal, economical service life under such conditions.

In this regard, the following properties are particularly significant for optimal service behaviour:

- high hardness and strength
- high thermal conductivity
- high hardness and tensile strength at elevated temperatures
- high softening and recrystallisation temperatures
- high thermal-mechanical fatigue strength

KME – materials for casting wheels

Today KME casting wheels are used throughout the world in all types of plants. In order to optimise the service life of the casting wheel, and with regard to the specific stresses encountered in the operation, KME has developed the materials CuAg, ELBRODUR® G and ELBRODUR® GF.

CuAg

Copper silver (CuAg/DPS-Cu) casting wheels are used for applications with medium to high stress such as occur when casting aluminium wire. The alloy has a high thermal conductivity and very good tensile strength properties.


ELBRODUR® G

ELBRODUR® G is a special KME material developed for mould applications. In addition to high tensile strength, the precipitation hardened CuCrZr alloy exhibits very good thermal conductivity and elevated softening temperatures, as well as high thermal fatigue strength. Casting wheels made of ELBRODUR® G are used throughout the world on wire casting equipment for casting copper and aluminium.

ELBRODUR® GF

The material, ELBRODUR® GF, is a further development of the ELBRODUR® G material that is specially engineered to casting wheel applications. The fatigue strength of this material is up to double that of the standard alloy, while the very good electrical/thermal conductivity values are maintained. The excellent property combination of this alloy is achieved through special alloy adjustment of the elements and a fine-tuned thermo-mechanical treatment. Service life improvements of 60 - 100 % were achieved with ELBRODUR® GF casting wheels in applications for copper wire casting equipment.

Fatigue strength of KME mould materials at elevated temperatures

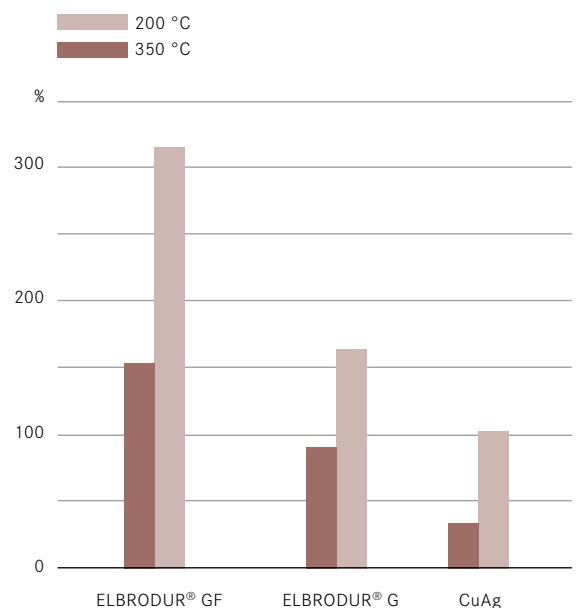


KME – materials for dam blocks

The extreme stresses to which dam blocks are subjected when opening and closing the belt during a rotation require high strength and hardness to prevent premature mechanical wear. At the same time, the material must have good thermal conductivity for high speed casting applications, and must not be sensitive to the formation of thermal shock cracks.

OSNISIL® G

The KME developed alloy OSNISIL® G, a material for dam blocks used in twin-belt type continuous casting machines, is the perfect solution for the required properties mentioned above. It offers a high basic physical strength and hardness as well as the necessary thermal conductivity and fatigue strength to prevent cracking in the T-slot zone, even when exposed to extreme thermal shocks as experienced, for example, during the short-term standstill of the machine. As a result, KME dam blocks offer a high degree of safety.

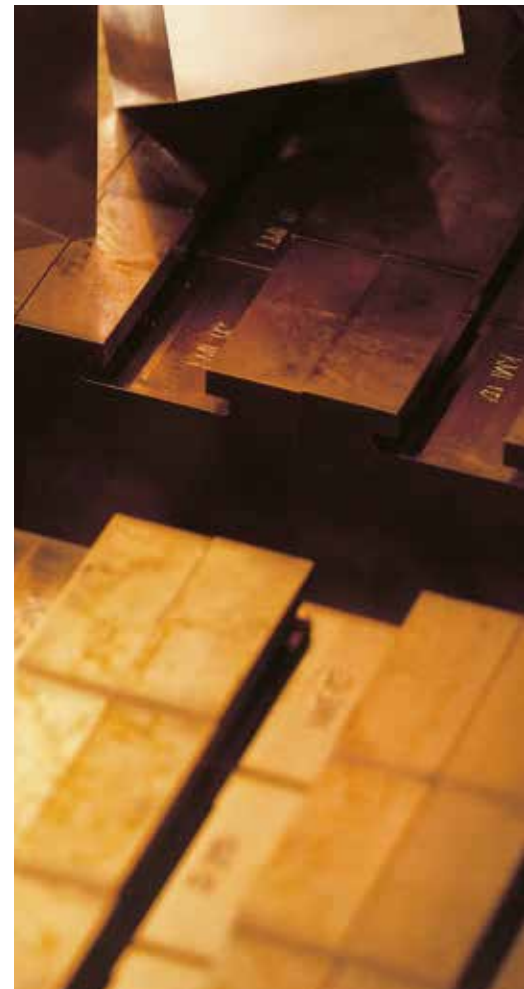

KME – materials for casting sleeves

Moulds are subject to high thermal and mechanical fatigue stresses when casting nonferrous metals in (thin) strip casting. Mould materials for such applications must satisfy high strength requirements even at elevated temperatures. At the same time, a minimum ductility is required to prevent cracks in the material from spreading.

ELBRODUR® G

Precipitation hardened ELBRODUR® G, a material based on CuCrZr, offers distinct advantages for applications with casting sleeves. It offers distinctly higher strength, hardness and ductility – together with very high electrical conductivity of approximately 83% IACS. Its favourable combination of properties makes it a material ideally suited for the manufacturing of casting sleeves.

ELBRODUR® B 95

ELBRODUR® B 95 is a highly developed, state-of-the-art, CuCoBe alloy which obtains its particular properties by way of precipitation hardening and a special thermo-mechanical processing. The material possesses a medium thermal conductivity, and excellent thermal and mechanical properties which it retains even at high temperatures.

ELBRODUR® NIB

This is a newly developed material based on CuNiBe. It has been developed specifically for use in moulds for near-net-shape casting and other moulds that need to withstand particularly high stresses.

Its outstanding characteristics are high strength along with medium conductivity, and it has a special resistance to cracking when exposed to thermal stresses caused by large temperature fluctuations in the mould wall.





Properties and Applications of KME Nonferrous Mould Alloys

Material	CuAg	ELBRODUR® G	ELBRODUR® GF	OSNISIL® G	ELBRODUR® B 95	ELBRODUR® NIB
Thermal conductivity	High	High	High	Medium	Medium	Medium
Softening/Recryst. temp.	Medium	Very high	Very high	Very high	Very high	Very high
Strength/Hardness	Medium	High	High	Very high	Very high	Very high
Application	Casting wheels	Casting wheels Casting sleeves	Casting wheels	Dam blocks	Casting sleeves	Casting sleeves

Fig. 1
Recrystallisation/softening behaviour of KME casting wheel materials.

— CuAg
— ELBRODUR® G/GF
— ELBRODUR® B 95/NIB

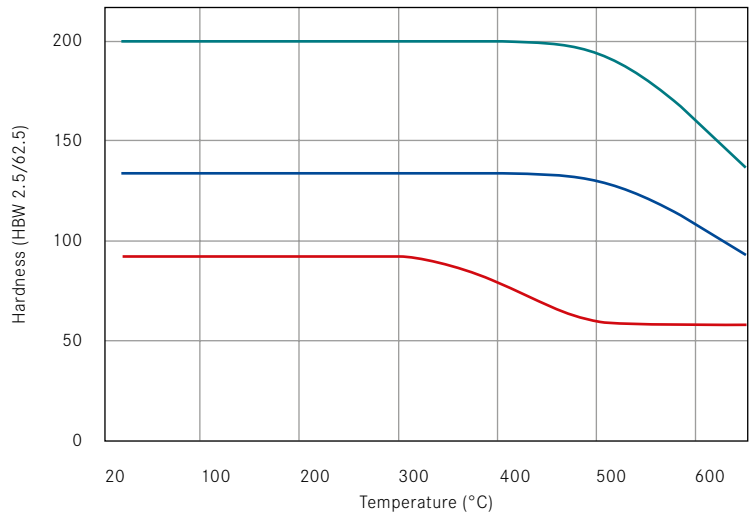


Fig. 2
Creep characteristics of mould materials
(temperature 200 °C/392 °F, stress 150 MPa)

— CuAg
— ELBRODUR® G/GF

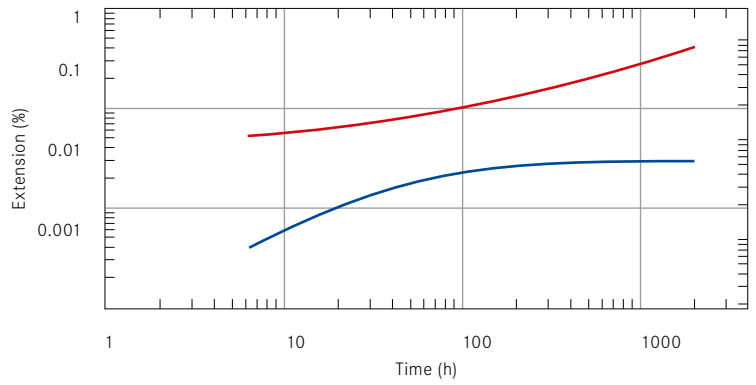


Fig. 3
Hardness and electrical conductivity
of KME mould materials

■ Brinell hardness
HBW 2.5/62.5
■ Electrical conductivity
% IACS


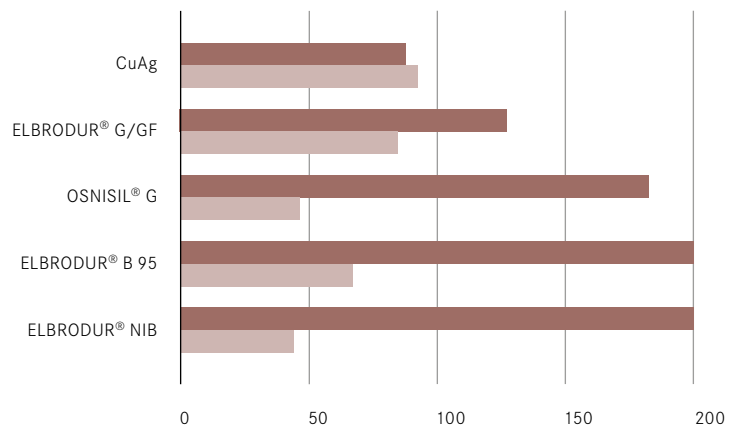


Fig. 4
Thermal conductivity as a function of temperature

— CuAg
— ELBRODUR® G/GF
— ELBRODUR® B 95
— ELBRODUR® NIB

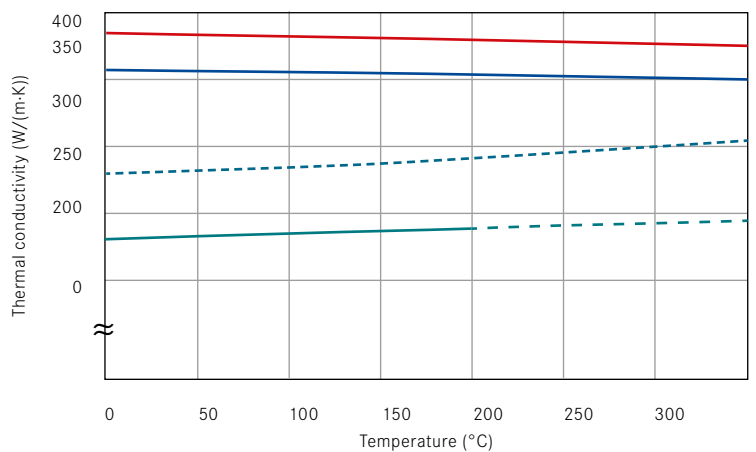

KME mould materials for casting nonferrous alloys

AMM[®] – advanced mould materials

Table 1 **KME Materials for casting wheels**

Material Properties*	Temperature		Units	CuAg	ELBRODUR [®] G	ELBRODUR [®] GF
	°C	°F				
Chemical composition (without copper)				0.09 Ag	0.65 Cr	0.65 Cr
				0.004 P	0.1 Zr	0.1 Zr
Physical Properties	°C	°F				
Electrical conductivity	20	68	S·m/mm ²	56	48	49
				% IACS	96	83
Thermal conductivity	20	68	W/(m·K)	377	350	345
Coefficient of thermal expansion	20-300	68-572	10 ⁻⁶ /K	17.7	18	18
Recrystallisation temperature	-	-	°C	370	700	700
Softening temperature***	-	-	°C		590	590
Modulus of elasticity	20	68	10 ³ MPa	125	128	128
Mechanical Properties	°C	°F				
0.2 % Proof stress R _{p0.2}	20	68	MPa	270	255	340
	200	392		255	240	310
	350	662		(195)	220	270
	500	932		(30)	(200)	(230)
Tensile strength R _m	20	68	MPa	285	390	420
	200	392		260	340	380
	350	662		(200)	280	320
	500	932		(90)	(220)	(260)
Elongation A ₅	20	68	%	18	27	22
	200	392		14	25	20
	350	662		(10)	23	18
	500	932		(40)	(21)	(16)
Hardness HBW	20	68	2.5/62.5	90	120	130

Units: 1 MPa = 1 N/mm² = 0.102 kgf/mm² = 0.145 ksi; 1 W/(m·K) = 2.388 · 10³ cal/(cm·s·°C)

* Values may change with varying thermal and mechanical treatment due to geometry and manufacturing procedure

** Measurement according to DIN ISO 5182

() Values may change due to restricted reproducibility of measurement

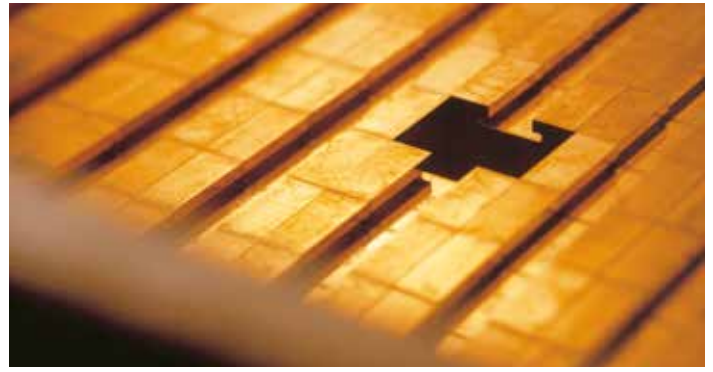


Table 2 **KME Materials for dam blocks and casting sleeves**

Material Properties*	Temperature		Units	OSNISIL® G	ELBRODUR® G	ELBRODUR® B 95	ELBRODUR® NIB
	°C	°F					
Chemical composition (without copper)				2.1 Ni	0.65 Cr	1.0 Co	1.5 Ni
				0.7 Si	0.1 Zr	0.1 Be	0.2 Be
				0.3 Cr			
Physical Properties	°C	°F					
Electrical conductivity	20	68	S-m/mm ²	25	49	33	40
				43	83	57	69
Thermal conductivity	20	68	W/(m·K)	185	350	240	290
Coefficient of thermal expansion	20-300	68-572	10 ⁻⁶ /K	18	18	18	18
Recrystallisation temperature	-	-	°C	(650)	(800)	(800)	(800)
Softening temperature**	-	-	°C	590	580	590	590
Modulus of elasticity	20	68	10 ³ MPa	140	128	128	128
Mechanical Properties	°C	°F					
0.2 % Proof stress R _{p0.2}	21	68	MPa	500	270	490	510
	200	392		480	255	450	500
	350	662		(440)	230	430	470
	500	932		(350)	(200)	(400)	(420)
Tensile strength R _m	20	68	MPa	650	390	630	630
	200	392		570	340	570	570
	350	662		(470)	290	500	540
	500	932		(370)	(230)	(440)	(430)
Elongation A ₅	20	68	%	17	25	13	12
	200	392		10	24	11	10
	350	662		(3)	22	(5)	(4)
	500	932		(2)	(20)	(3)	(3)
Hardness HBW	20	68	2.5/62.5/187.5 ¹⁾		125	200	200
Hardness HV	20	68	HV 10	200			

Units: 1 MPa = 1 N/mm² = 0.102 kgf/mm² = 0.145 ksi; 1 W/(m·K) = 2.388 · 10³ cal/(cm·s·°C)

* Values may change with varying thermal and mechanical treatment due to geometry and manufacturing procedure

** Measurement according to DIN ISO 5182

() Values may change due to restricted reproducibility of measurement

¹⁾ Hardness HBW: 2.5/62.5 for ELBRODUR® G, 2.5/187.5 for ELBRODUR® B95 and ELBRODUR® NIB



Nonferrous mould manufacturing

Melting and casting

In KME's melting and casting facilities, copper and copper alloys are produced on state-of-the-art systems. Cathodic, high-purity copper is mainly used for producing the materials and the composition of the melt is monitored by an analysis system. Billets and slabs can be cast on various casting systems in different geometries, so that the dimensions of the starting material offer favourable properties for subsequent downstream production stages, e.g. when certain degrees of formability must be ensured for forging operations.

KME after-sales service

KME mould materials developed and produced by KME make it possible to implement copper materials that are ideally suited to customer requirements.

Moreover, the uncompromising KME quality standard ensures that our customers are only supplied with products that are equal to this quality requirement.

To achieve high productivity and good product quality with the casting plant, other casting parameters must also be ensured, most notably those for maintaining and servicing the moulds. KME after-sales service supports our customers in this regard by responding to technical questions and problems. Customer-specific service packages can also be negotiated as required.

Forming

Close coordination between the casting process and the subsequent forming process is crucial to ensure optimal material properties and tight tolerances in production.

KME has hot and cold rolling systems for forming the material in addition to systems for the forging, extrusion, and heat treatment of material.

Machining

Modern, precise CNC-driven machine tools are available for the final machining of moulds. The construction data of components used to produce the desired work-piece geometry is acquired using integrated CAD/CAM systems.

Quality assurance

Supplying high-quality components is an essential prerequisite of our business that assures our customers smooth, trouble-free plant operation. To ensure that our customers only receive high-quality components, all processes and operational procedures at KME are certified in accordance with the DIN ISO 9000 series.

In addition to the analysis of materials, KME has a wide range of test procedures such as ultrasonic and thermal fatigue testing as well as strength tests.

Nonferrous moulds manufacturing

Melting

Casting

▼
Hot forging

Cold forging

Heat treatment

Machining

Quality control

Casting sleeve

▼
Hot forging

Hot/cold rolling

Heat treatment

Machining

Quality control

Casting wheel

▼
Hot forming

Hot forming

Heat treatment


Machining

Quality control

Dam block




Typical shapes

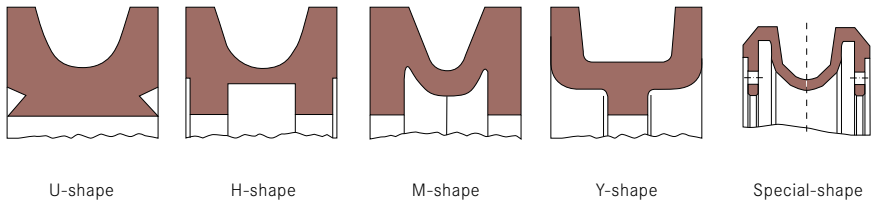

Manufacturing range of KME casting wheels

KME covers the casting wheel size range from 600 to 4,200 mm (other dimensions on request). Thus KME can supply casting wheels in all nonferrous plants in the desired designs and materials.

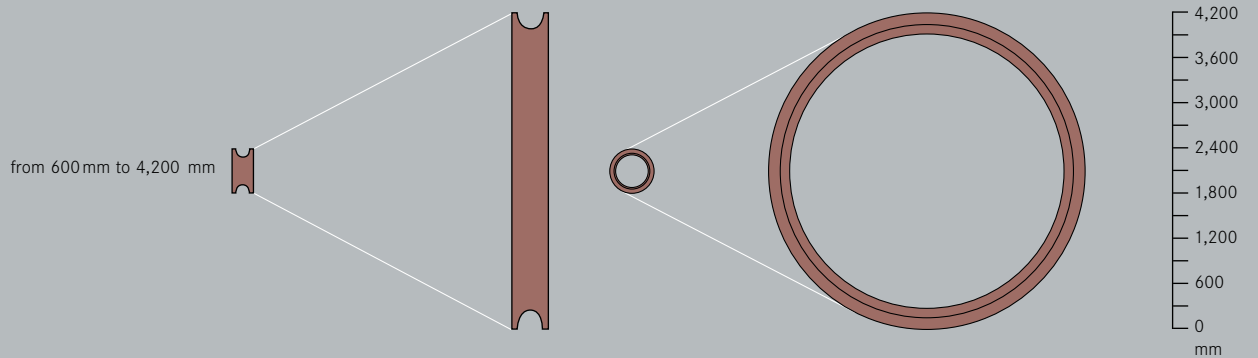

KME Germany GmbH & Co. KG

Engineered Products

Melting and Casting

P.O. Box 3320

49023 OSNABRÜCK

Klosterstraße 29

49074 OSNABRÜCK

GERMANY

Fon +49 (0)541 321-3218

Fax +49 (0)541 321-3005

www.kme.com

info-moulds@kme.com

Special Products

